

## SUPPORT NETWORK

### Experience Our Mobile Service Van For Fast And Reliable Solutions



#### ADDRESS:

##### North Zone

ESCORTS LTD. - CONSTRUCTION EQUIPMENT  
4<sup>th</sup> Floor 409, Jasola Vihar,  
Elegance Tower, Near Apollo Metro Station,  
New Delhi – 110019

##### East Zone

ESCORTS LTD. - CONSTRUCTION EQUIPMENT  
Eco Centre, Ambuja Neotia,  
609, 6<sup>th</sup> Floor, EM Block,  
Salt Lake Sector-V, Kolkata – 700091

##### West Zone

ESCORTS LTD. - CONSTRUCTION EQUIPMENT UNIT 1,  
3<sup>rd</sup> Floor, A-Wing, Times Square,  
Andheri - Kurla Road, Opp. Mittal Industrial Estate,  
Andheri (East), Mumbai – 400059

##### South Zone

ESCORTS LTD. - CONSTRUCTION EQUIPMENT  
Subham Square, 1<sup>st</sup> Floor, S.No.41/9, 1<sup>st</sup> Main Road,  
Karambakkam, Porur, Chennai – 600116.

MKT/21.1XT1610

## WHEN YOU NEED EXTRA **XT 1610**



Escorts Engine: 75 HP | Max. Dig Depth: 4.8 m | Load Over Height: 3.51 m



GET IT ON  
**Google Play**  
Download Customer App  
for more details

Authorised Dealer

Customer Support No.:  
**1800 180 4488**

(Timings: 9.30 am - 6.00 pm, Monday to Friday)

E-mail:  
[ece.marketing@escorts.co.in](mailto:ece.marketing@escorts.co.in)

**Escorts Construction Equipment:** Plot No. 219, Sector-58, Ballabhgarh- 121004, Faridabad, Haryana (INDIA)  
Tel.: 0129-2306574/2306598/2306571 **Fax:** 0129-2306572 **Website:** [www.escortsgroup.com](http://www.escortsgroup.com)

**ESCORTS**  **WHITE LINE**

## SPECIFICATIONS



### ENGINE

- Proven, powerful and fuel efficient Escorts E4.346CR water cooled turbo charged diesel engine.
- Gross power: 55 kw (75HP) @ 2000 RPM
- Max Torque (Gross): 340Nm @ 1400 RPM
- CEV - IV emission norms



### HYDRAULICS

- Hydraulic pump - Tandem Gear Pump
- Maximum flow (both pumps) 116 lpm@ 2000 RPM
- System main relief setting 225 bar
- Fixed flow, open centre two pump unloading energy efficient hydraulic system.



### TRANSMISSION

- Four speed (4F, 4R gear) Syncro shift reversing shuttle transmission provides superior traction, gradeability higher force while entering pile or during dozing operation.
- Neutral start provision prevents starting when shuttle is engaged.
- Gear lever with transmission disconnect switch adds to the overall ease of gear shifting.



### WEIGHT

- 2WD : 8190 Kg
- 4WD : 8350 Kg



### TRAVEL SPEED

- |                      |                           |
|----------------------|---------------------------|
|                      | F/R gear                  |
| 1 <sup>st</sup> Gear | 5.3 kmph/4.6 kmph         |
| 2 <sup>nd</sup> Gear | 8.5 kmph/7.0 kmph         |
| 3 <sup>rd</sup> Gear | 18.2 kmph/Not recommended |
| 4 <sup>th</sup> Gear | 36.0 kmph/Not recommended |



### BRAKES

- Service Brakes: Hydraulically actuated dual line, self adjusting, oil immersed, multi disc type on rear axle
- Parking Brakes: Hand-operated caliper disc brakes



### AXLES

- 2WD : Front steer axle with 16 deg oscillation for maximum ground contact in undulated condition
- 4WD : Front drive and steer axle with 12 deg oscillation for maximum ground contact in undulated condition
- Rear drive axle, rigidly mounted to chassis



### STEERING

- Hydrostatic power steering in front wheel
- Hydraulic supply from pump via priority valve for quick response steering
- Working pressure: 120 bar



### TYRES

- Front : 2WD 9.00 x 16 – 16 PR  
4WD 12.5 x 80 – 12 PR
- Rear : 16 x 9 – 28 – 12 PR



### SERVICE REFILL CAPACITIES

- |                      |      |        |
|----------------------|------|--------|
| Hydraulic system oil | 80   | litres |
| Fuel tank            | 134  | litres |
| Engine coolant       | 15   | litres |
| Engine oil           | 11.5 | litres |
| Transmission oil     | 16.5 | litres |
| Rear axle oil        | 17.1 | litres |
| Brake reservoir oil  | 1.0  | litres |



### EQUIPMENT MONITORING SYSTEM

GPS + GSM based equipment monitoring system is a standard fitment and provides sms alerts for effective equipment management and acts as a diagnostic tool.



### WARNING MESSAGE-SMS, MAIL, ONLINE

- Engine Oil Pressure
- Battery Charging Status
- Engine Coolant Temperature
- Hydraulic Oil Temperature
- Transmission Oil Temperature
- Machine Idle Information
- Fuel Level Information



### OPTIONAL ATTACHMENTS

- Heavy Duty Rear Tyres: 14x25-20 PR
- Rock Breaker
- Ripper Tooth
- Extendible Dipper
- Trenching Buckets - 0.09 m³, 0.12 m³, 0.18 m³
- Special Purpose Buckets - 0.30 m³, 0.32 m³
- Coal Bucket - 1.5 m³
- Multi Purpose (6-in-1) Bucket
- 300 mm Trench Bucket (Optical Fibre Cable Laying Application)



### ELECTRICAL

- 12V Electrical Sytem supported by 150AH maintenance free battery, 90 Amp alternator & safety controller starter motor to avoid over cranking
- Outrigger engagement warning for the safety of equipment
- FM radio & music system

#### Warning

All dimensions, Weights, timings mentioned are with standard tyres. Dipper, Buckets are variable within ± 5% ECE has the right to change values given & design shown without giving a notification.

**NOTE** Technical modification reserved. All dimensions & weights are variable within ± 5% over indicated values.

## PERFORMANCE & DIMENSIONS

### LOADER PERFORMANCE (Figure 1)

M : Dump height (Cutting edge)	3.00	m
N : Load over height (Cutting edge)	3.51	m
O : Pin height (Cutting edge)	3.70	m
P : Pin forward reach	0.43	m
Q : Reach at ground	1.57	m
R : Max reach at full height	1.22	m
S : Reach at full height-Bucket dumped	0.85	m
T : Below ground level dig depth	0.13	m
u : Rollback at ground	45	deg
V : Dump angle	45	deg
Bucket breakout force	6425	kgf
Loader arm breakout force	5777	kgf
Payload	1980	kg
Return to Dig	Available	
Sell evelling	Available	
Loader Bucket Capacity	1.2	m³

### EXCAVATOR PERFORMANCE (Figure 1 & 2)

A : Max dig depth (bucket in dump position)	4.80	m
B : Reach ground level to rear wheel center	6.97	m
C : Reach ground level to slew center	5.65	m
D : Reach at full height to slew center	2.23	m
E : Side reach to center line of machine	6.00	m
F : Max working height (Stab's fully out)	6.30	m
G : Max load over height (Stab's fully out)	4.39	m
H : King post travel	1.00	m
J : Bucket rotation power	187	deg
Bucket tear out force	6018	kgf
Dipper tear out force	3250	kgf
Lift capacity to bucket pivot at full reach (SAE J31)	1554	kgf
Co-oxial Carriage		
Excavator Bucket capacity	0.26	m³

### STATIC DIMENSIONS (Figure 3,4 & 5)

AA : Overall length (transport mode)	6.28	m
AI : Overall length (travel mode)	7.85	m
BB : Wheel base	2.14	m
CC : Rear wheel to slew center	1.38	m
DD : Minimum ground clearance	0.35	m
EE : Slew ground clearance	0.59	m
GG : Height to top of cab	2.88	m
HH : Overall height	3.78	m
JJ : Track width - Rear	1.75	m
KK : Track width - Front	1.87	m
LL : Width over bucket	2.38	m
LI : Width (transport mode)	2.56	m

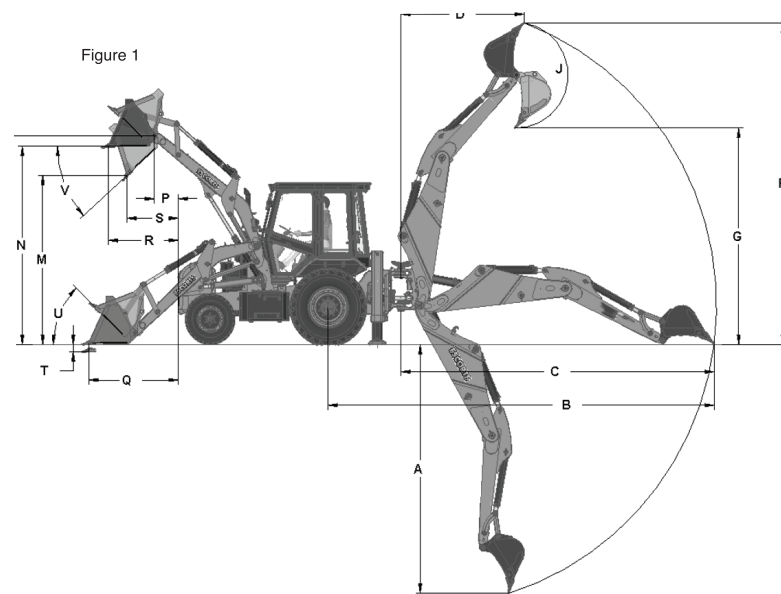


Figure 2

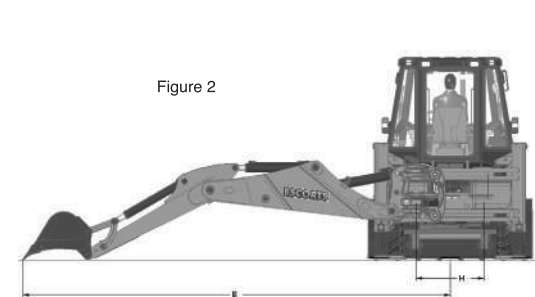


Figure 3



Figure 4

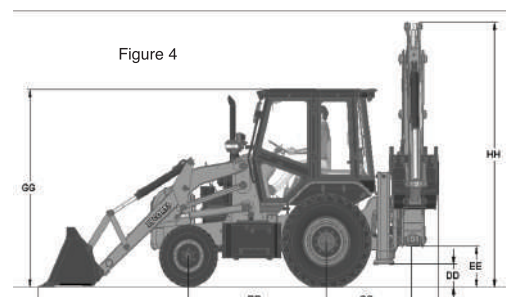


Figure 5



#### Warning

All dimensions, weights, timings mentioned are with standard tyres. Dipper, buckets are variable within ± 5% ECE has the right to change values given & design shown without giving a notification.